
## **Array By Hampton™ Deadbolt Specifications**

## Cooper



Finishes	119 Satin Nickel	125 Polished Chrome	150 Tuscan Bronze∞
Cooper	•	•	•
Barrington	•	•	•

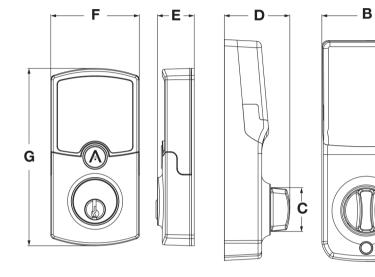

Styles	A (in)	B (in)	C (in)	D (in)	E (in)	F (in)	G (in)
Cooper	6.85	2.76	1.36	2.04	1.14	2.75	5.50
Barrington	6.85	2.76	1.36	2.04	1.14	3.00	5.55

## **Barrington**



Array Deadbolt Specifications & Options			
ANSI Grade:	Meets Grade 2 standards		
Cylinder:	KW1, SC1 available, 5 pin		
Keying:	Keyed Different. Master key, construction key available		
Latch:	6-way Adjustable 2-3/8" and 2-3/4", round, square and drive-in		
Strike:	2-3/4" Square corner with 2-3/4" reinforcement plate		
Door Preparation:	Cross bore 2-1/8", edge bore 1", 1" x 2-1/4" latch mortise, backset 2-3/8" or 2-3/4"		
Door Thickness:	1-3/8" to 1-3/4"		
Faceplate:	2-1/4" round and square corner		
Warranty:	Lifetime mechanical and finish, 1 year electronics		