


# MODERN RECTANGULAR TWO POINT DOUBLE CYLINDER



Outside Trim

Inside Trim

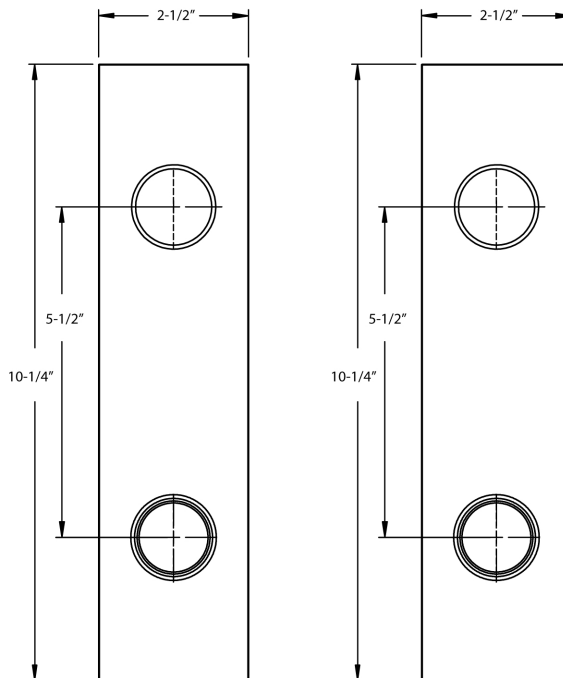

## Door Thickness Specifications

### Standard Door Thickness: 1 5/8" - 1 3/4"

#### Standard Components:

- Double Cylinder Tailpiece
- Inside Passage Half Spindle
- 1" Wood Screws
- Threaded Tubes & Machine Screws
- Supplied upon request for Hollow-Core Doors*
- 3" Deadbolt Mounting Screws
- Full-Lip Strike Plate
- Deadbolt Strike Plate

### Extended Door Thickness: 1 3/4" - 2 1/2"

#### Extended Components:

- Long Double Cylinder Tailpiece
- Long Inside Passage Half Spindle
- 1" Wood Screws
- Threaded Tubes & Machine Screws
- Supplied upon request for Hollow-Core Doors*
- 3 1/2" Deadbolt Mounting Screws
- Extended Full-Lip Strike Plate
- Deadbolt Strike Plate