




The 7000 Series is also available in a **Complete One Box Solution**

7000 Series

The dual pre-load solution for cylindrical latch bolts and rim exit devices

Offers two solutions to address pre-loaded doors. The in-frame adjustable feature allows the installer to easily adjust the electric strike opening to accommodate the horizontal position of the latchbolt after installation. The pre-load release function allows the electric strike to operate smoothly throughout the year under varying loads on the door caused by air-conditioning pressure, changes in the weather, warped doors or doors with weather stripping that often bind standard electric strikes. This unit accommodates cylindrical latchbolts up to 5/8" throw and rim exit latchbolts up to 3/4" throw.

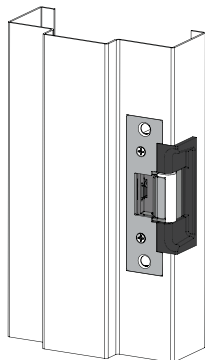

Specifications

- UL 1034, burglary-resistant listed
- ANSI BHMA A156.31, Grade 1 (791 and 792 options)
- ANSI/BHMA A156.31, Grade 2 (783S, 786S, and 789S options)
- MEA New York City accepted

Frame Application

- Metal
- Wood

Electrical

- .45 Amps @ 12VDC continuous duty
- .25 Amps @ 24VDC continuous duty

7000 Models

7000

Universal electric strike
Faceplate options ordered separately, see page 30


7000C*

Complete electric strike
Includes the 791 and 792 faceplates in the box



Model 7000C includes a 791 and a 792 faceplate in the box

*Complete Pac is for cylindrical latchbolt only

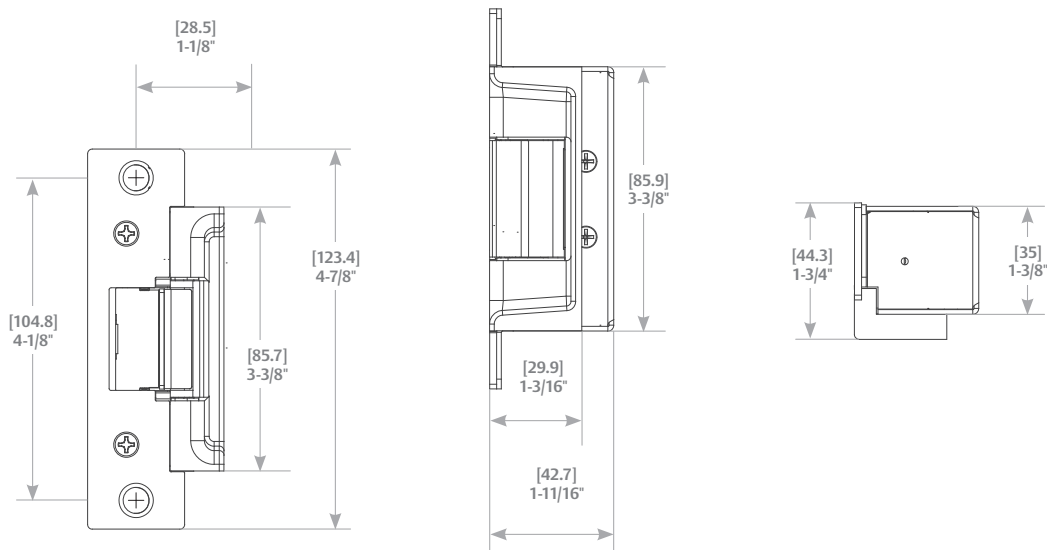

Standard Features

- Stainless steel construction
- Tamper resistant
- Static strength 1,500 lbs. (791 and 792 options)
- Dynamic strength 70 ft-lbs. (791 and 792 options)
- Static strength 1,000 lbs. (783S, 786S, and 789S options)
- Dynamic strength 50 ft-lbs. (783S, 786S, and 789S options)
- Endurance 500,000 cycles
- Field selectable fail secure/fail safe
- Accommodates pre-load (fail secure only)
- Horizontal adjustment
- Non-handed
- Internally mounted solenoid
- Strike body depth 1-11/16"
- Plug-in connector
- Trim enhancer (791 and 792 options)
- Pocket adapter (786S and 789S options)
- Three-year limited warranty

Optional Features

- **LBM** » Latchbolt monitor

Accessories

- SMB** » Surface mounting box (783S and 789S options)
- 7000-104** » Lip extension trim adapter
- 7000-105** » Trim enhancer (goof plate)
- 7000-106** » Keeper pocket adapter
- 7000-107** » Full keeper shim pack
- 7000-108** » 1/8" spacer plate (783S and 789S options, black finish only)
- 7000-110** » Replacement strike plate (791 and 792 option)
- 150** » Strike latch guard
- 154-MTK** » Metal template kit
- 2001M** » Plug-in bridge rectifier
- 2004M** » ElectroLynx® adapter
- 2005M3** » SMART Pac® III
- 2006M** » Plug-in buzzer

Finishes

(791 and 792 options)

- 630** » Satin stainless steel
- 605** » Bright brass
- 606** » Satin brass
- 612** » Satin bronze
- 613C** » Brown nylon powder coated
- 629** » Bright stainless steel
- BLK** » Black

**Complete Pacs are only available in the 630 finish*

Finishes

(783S, 786S and 789S options)

- 613C** » Brown nylon powder coated
- 626** » Brushed chrome



CYLINDRICAL
LOCKSETS



RIM EXIT DEVICES



FIELD SELECTABLE
(FAIL SECURE/FAIL SAFE)



UL 1034
BURGLARY LISTED



7000 Series Faceplate Options



Operation: After releasing the latchbolt, the keeper returns to the locked position



4-7/8" x 1-1/4"

791 Option

For use with: Cylindrical locksets up to 5/8" throw

» ANSI/BHMA Numbers: E09321, E09322, E09323



GRADE 1



7-15/16" x 1-7/16"

792 Option

For use with: Cylindrical locksets up to 5/8" throw

» ANSI/BHMA Numbers: E09321, E09322, E09323



GRADE 1



Operation: After releasing pullman latch, the keeper returns to the locked position



9" x 1-3/4" x 11/16"

783S Option

For use with: Rim exit devices in metal jambs with up to a 3/4" pullman latch

Compatible locksets: American Device, Arrow, Dor-O-Matic, Monarch, Precision, Sargent, Von Duprin, Yale

» ANSI/BHMA Numbers: E09311, E09312, E09313



GRADE 2



6-1/2" x 1-3/4" x 1/2"

786S Option

For use with: Rim exit devices in aluminum jambs and surface mounted vertical rod exit devices with up to a 3/4" pullman latch

Compatible locksets: American Device, Arrow, Dor-O-Matic, Jackson, Monarch, Precision, Sargent, Von Duprin, Yale

» ANSI/BHMA Numbers: E09311, E09312, E09313



GRADE 2



9" x 1-3/4" x 1/2"

789S Option

For use with: Rim exit devices in aluminum jambs with up to a 3/4" pullman latch. Includes keeper pocket adapter.

Compatible locksets: American Device, Arrow, Dor-O-Matic, Jackson, Monarch, Precision, Sargent, Von Duprin, Yale

» ANSI/BHMA Numbers: E09311, E09312, E09313



GRADE 2