



ASSA ABLOY

COMMERCIAL THRESHOLD


Applies to the following thresholds: **179_P, 2001_P, 179_V, 2001_V**

Testing/Ratings:




Category J gaskets for use with listed steel frames and/or classified steel covered composite, hollow metal doors rated up to and including 3 hours; wood and plastic covered composite doors rated up to and including 1-1/2 hours; and wood core doors rated for 20 minutes. (Thresholds may or may not contain gasketing material).

Tools Required:



Installation Instructions:

Top (plan) view of door opening (out-swing type)

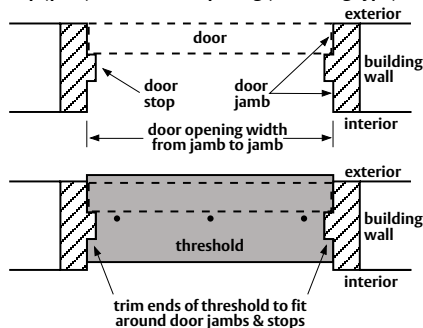

1. Carefully cope to fit within the frame opening making sure seal will make contact with door face.
2. Trim seal 1/16" longer than threshold at each end. Use a sealant or compound at all edges and joints.
3. Fasten with screws provided.

www.pemko.com

© 2009 Pemko Manufacturing Co.
CT16_WEBINS
Rev 1 - 07.02.09