



## Mechanical Interconnected Lockset

The RS210F and CS210F mechanical interconnects provide panic-free, single motion egress and comply with the requirements of the National Fire Protection Association (NFPA) Codes and local building codes.

To meet the demands of residents, the mechanical interconnect is available with several new features:

- Both the RS210F and CS210F accept a variety of commercial and all residential levers to provide never before available suiting options for our Schlage interconnect product line
- RS210F available with Grade 1 SecureKey cylinder
- Available in split lever designs and finishes
- Select levers are code compliant with return to door requirements and meet ADA requirements
- The interconnect mechanism is adjustable to 4" and 5-1/2" door preparations

### *Increased Security with SecureKey® Technology*

- Bump and pick resistant
- ANSI / BHMA Grade 1 Cylinder
- SecureKey products have 10 times more key-cut combinations, reducing the potential of key duplication in large communities
- SecureKey not available on CS210 product



### *Re-key without removing the lock from the door*

- No more repinning cylinders
- SecureKey cylinders can be keyed to an existing standard pin and tumbler Schlage C keyway (5 key biting configuration)
- SecureKey cylinders are available with most Schlage branded residential, mechanical keyed products

The RS210F and CS210F delivers the latest features in security innovation to give both you and your residents the peace of mind that comes with real security.



### *Benefits*

- Single motion egress meets Life & Safety code requirements
- Ideal for both new construction and renovation/aftermarket projects
- Easy to install, fits standard door preparations

### *Markets*

- Apartment Communities
- Assisted Living Communities
- Student Housing
- Light Commercial
- Single Family Condominiums and Town Houses



## Minimum Stile Recommendation

2-3/4" Backset



2-3/8" Backset



## Specifications

- ANSI/BHMA Grade 2 certified
- **UL Rating** – UL 3 hour rating is standard
- **Latch** – UL latch comes with 1" x 2-1/4" square and round corner faceplate (square corner standard, round corner included in package). 1" edge bore required
- **Strikes** – 1-1/8" x 2-3/4" square corner deadbolt strikes and 2-1/4" x 1-5/8" square corner full lip latch strike reinforcer. Dust box not included
- **Backset** – Adjustable backset, fits 2-3/8" or 2-3/4" backsets
- **Levers** – All lever trim is non-handed and field reversible
- **Stile width** – Minimum 4-1/2" for 2-3/8" backset, minimum 5" stile for 2-3/4"
- **Return to Door** – Saturn (SAT) and Neptune (NEP) are Return to Door (RTD) code compliant
- **RS210 Cylinder** – 5 pin solid brass, keyed 5-pin, C keyway, keyed different (KD), Keys are 5-pin, C section. SecureKey cylinder available as an option
- **CS210 Cylinder** – 6 pin solid brass, keyed 6-pin, C123 keyway, keyed different (KD), Keys are 6-pin, Everest C123 section. Not available with SecureKey
- **Door Range** – 1-3/8" to 1-3/4" standard. 1-3/4" to 2" optional. Must be specified
- **Center to Center** – Fits 4" or 5-1/2" center to center door preps

## Style Options



**10x 10 times more secure\***

**10 Times More Key Combinations**


Competition	SecureKey
1	10

\*SecureKey Technology enables 10 times greater number of possible key-cut combinations, reducing the chance of someone else's key opening your door

## Lever Options



## Finish Options

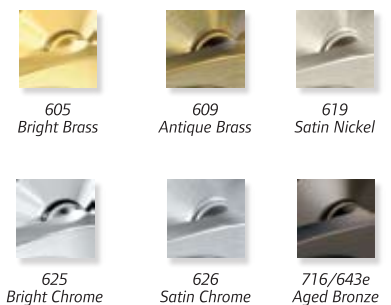

\* All finishes may not be available on some designs.

