

B-Series

Commercial Grade Deadbolts



SCHLAGE,





Contents

- 4-5 Mechanical Lock Guide
- 6-7 B-Series Overview
- 8-9 B600/700/800 Performance Features and Exploded View
- 10 Designs
- 11 Finishes
- 12-13 Deadbolt Functions
- 14-15 B500 Performance Features and Exploded View
- 16 Designs and Finishes
- 17 Deadbolt Functions
- 18-19 B250 Performance Features and Exploded View
- 20 Designs and Finishes
- 21 Deadbolt Functions
- 22 Cylinders and Key Systems
- 23 Standard Cylinders and Primus XP High Security Cylinders
- 24 Full Size Interchangeable Core
- 25 Small Format Interchangeable Core
- 26 Latches and Bolts
- 27 Strikes, Thumbturns and Inside Plates
- 28 Accessories and Other Parts
- 29 Tailpieces
- 30 Specifications and Certifications

Pictured here: B250 (Grade 2) deadbolt and D-Series Plymouth knob shown in 626 Satin Chrome

Cover photo: B500 (Grade 2) deadbolt with AL-Series Neptune lever in 626 Satin Chrome

Put Your Trust in the Name You Know

For more than 90 years Schlage® has been providing innovative security solutions for schools, hospitals, hotels, condominiums and a host of other commercial buildings. Today, Schlage is at the forefront of cutting-edge technology including wireless security, access control systems including readers, credentials and biometrics. With a wide range of products, styles and finishes, Schlage has what you need no matter how demanding your project specifications may be. And, we stand behind every product we make with the best after-sales service in the business. It's this commitment to design, performance and technology that ensures you can stand behind our products too.

Real Security is Knowing Exactly What You Want and Getting It

When you know exactly what you want, you don't want to waste time finding out whether it meets your project specifications. That's why we offer the world's largest team of hardware specification writers to help you and your clients turn your vision into reality. And when it comes to products, our commercial suiting options, wide variety of lever designs and rich selection of finishes give you the tools you need to make your projects perfect. You know what you want. With Schlage you can be sure you'll get it.

Safety, Security and Confidence

When you choose a Schlage lock you can be sure you've done the job right the first time. After all, our products are among the most durable and dependable on the market today. Our locks are easy to install, and simple to repair and maintain. That means fewer callbacks for you, and total safety and security for your customers.

Be sure to ask your SSC representative to tell you about **Custom Solutions** by Ingersoll Rand Security Technologies. To learn more visit securitytechnologies.ingersollrand.com.











2

Environmental Solutions Fle

FlexibleConfigurations



Tubular Interconnected Locks	Tubular Locks	Tubular Interconnected Locks	Cylindrical Locks	Cylindrical Interconnected Locks
CS200-Series	S-Series	S200-Series	A-Series	H-Series
GRADE 2	GRADE 2		GRADE 2	
Security Level:				
ANSI/BHMA Certified A156.2-2003 Exceeds 400,000 ANSI Cycles Medium Traffic Typical Applications:	ANSI/BHMA Certified A156.2-2003 Exceeds 400,000 ANSI Cycles Light Traffic	- - Exceeds 400,000 ANSI Cycles Medium Traffic	ANSI/BHMA Certified A156.2-2003 Exceeds 400,000 ANSI Cycles Medium Traffic	- - Exceeds 400,000 ANSI Cycles Medium Traffic
Exterior	-	Exterior	Exterior	Exterior
Interior	Interior	Interior	Interior	Interior
New Construction	-	New Construction	New Construction	-
Retrofit	Retrofit	Retrofit	Retrofit	Retrofit
Functions Available:				
1 Function	6 Functions	5 Functions	11 Functions	5 Functions
-	-	-	-	-
-	-	-	-	-
Design Options:				
7 Finishes	7 Finishes	7 Finishes	10 Finishes	7 Finishes
15 Lever Styles	4 Lever Styles	4 Lever Styles	1 Lever Style	1 Lever Style
-	-	-	4 Knob Styles	2 Knob Styles
 Matching Rose Interior Escutcheons 	1 Matching Rose	 Matching Rose Interior Escutcheon 	1 Matching Rose	1 Matching Rose 1 Interior Escutcheon
Tactile Warning Available	- Tactile Warning Available	-	_	1 Interior Escutcheon
	<u> </u>			
Often Used In:				
Commercial	Commercial	Commercial	Commercial	Commercial
Commercial Multi-Family	Commercial Multi-Family	Commercial Multi-Family	Commercial Govt/Military	Commercial Govt/Military
Multi-Family	Multi-Family	Multi-Family	Govt/Military	Govt/Military
Multi-Family	Multi-Family	Multi-Family	Govt/Military Healthcare	Govt/Military

Not all functions and finishes available with all products. Please consult your SSC representative for details.

Colladeira U ada	Predhola		Collindical Looks	
Cylindrical Locks	Deadbolts	Cylindrical Locks	Cylindrical Locks	Mortise Locks
AL-Series	B-Series	D-Series	ND-Series	L-Series
GRADE 2	GRADE 2 GRADE 1	GRADE 1	GRADE 1	GRADE 1
Security Level:				
ANSI/BHMA Certified A156.2-2003 Exceeds 400,000 ANSI Cycles Medium Traffic	ANSI/BHMA Certified A156.5-2001 Exceeds 150,000/250,000 ANSI Cycles High Traffic Heavy Duty	ANSI/BHMA Certified A156.2-2003 Exceeds 800,000 ANSI Cycles High Traffic	ANSI/BHMA Certified A156.2-2003 Exceeds 800,000 ANSI Cycles Heavy Duty Traffic	ANSI/BHMA Certified A156.13-2005 Exceeds 1,000,000 ANSI Cycles Heavy Duty Traffic
Typical Applications:				
Exterior Interior New Construction Retrofit Functions Available:	Exterior - New Construction Retrofit	Exterior Interior - Retrofit	Exterior Interior New Construction Retrofit	Exterior Interior New Construction Retrofit
10 Functions - -	7 Functions 6 Functions 	 14 Functions 2 Electrified - 	29 Functions 6 Electrified Vandlgard® Available	49 Functions4 ElectrifiedVandlgard[®] Available
Design Options:				
 10 Finishes 4 Lever Styles - 1 Matching Rose - Tactile Warning Available 	10 Finishes - - - Indicator Rose	 Finishes Knob Styles Matching Rose - 	 9 Finishes 5 Lever Styles - 2 Matching Roses - Tactile Warning Available 	 Finishes Lever Styles Knob Styles Matching Roses Escutcheons Tactile Warning Available Antiligature Available
Often Used In:				
Commercial Healthcare Hospitality Office Retail	Commercial/Institutional Govt/Military Heavy Duty Residential Hospitality Office Retail	Institutional Govt/Military Hospitality Retail	Institutional Education Healthcare Office Retail	Institutional Education Healthcare Office

This chart shows the most common uses/applications and these products are often used in other applications in addition to those listed.

Rev. 3/13

B-Series B250 Deadlatches B500 Deadbolts B600/700/800 Deadbolts

Auxiliary locks for added security.

Auxiliary locks not only provide added protection for exterior entrance doors, they can also protect common use areas like pool gates and storage/utility spaces from unauthorized access. Schlage delivers flexibility and performance with a full line of auxiliary locks that range from heavy-duty to high-traffic performance, and complement our lock lines. A choice of styles and finishes ensures a consistent look across doors and throughout your building.

We don't compromise on security.

The safety and security of your clients' buildings is something we take very seriously. That's why every Schlage lock and deadbolt undergoes intensive testing to determine its ANSI grade level:

- Cycle tests
- Resistance tests
- Door impact tests
- Resistance tests
- Polt strongth tosts
- Warped door tests
- Bolt strength tests

We pay attention to these details so you can focus on creating a functional and aesthetically pleasing environment for your clients. In fact, every one of our B-Series locks meets ANSI Grade 1 or Grade 2 standards for safety.

Pictured here: B500 (Grade 2) deadbolt and ND-Series Sparta lever shown in 626 Satin Chrome

B-Series at a glance. B250 · B500 · B600/700/800

B250 Series: Grade 2 Deadlatch

B500 Series: Grade 2 Deadlock

B600 Series: Grade 1 Deadlock

B700 Series: Grade 1 Deadlock w/ Primus XP Controlled Access Cylinder

B800 Series: Grade 1 Deadlock w/ Primus XP High Security Cylinder, UL437 Rated

Functions

Product	ANSI	Deadbolt F	Deadbolt Functions						Deadlatch Functions		
		Single Cylinder Deadbolt	Double Cylinder Deadbolt	Classroom Deadbolt	Door Bolt Occupancy Indicator	Door Bolt	Door Bolt with Trim	Cylinder Only Deadbolt	Cylinder Only x Blank Plate Deadbolt	Single Cylinder Deadlatch	Double Cylinder Deadlatch
Interior		Thumbturn	Keyed	Thumbturn	Thumbturn	Thumbturn	Thumbturn	No Trim	Blank Plate	Thumbturn	Keyed
Exterior		Keyed	Keyed	Keyed	Indicator	No Trim	Blank Plate	Keyed	Keyed	Keyed	Keyed
B250	Grade 2									B250PD	B252PD
B500	Grade 2	B560P	B562P	B563P	B571	B580	B581		B561P		
B600	Grade 1	B660P	B662P	B663P		B680		B664P	B661P		
B700	Grade 1	B760P	B762P	B763P				B764P	B761P		
B800	Grade 1	B860P	B862P	B863P				B864P	B861P		

Finishes

inisnes	et al						0	P	1		
	605 Bright Brass	606 Satin Brass	609 Antique Brass	612 Satin Bronze	613 Oil Rubbed Bronze	619 Satin Nickel*	625 Bright Chromium Plated	626 Satin Chromium Plated	626AM Antimicrobial Coating*	643e Aged Bronze	

* Finish not available on B250

e = an equivalent finish to the BHMA standard.

ADA-Compliant Products 🕓

In compliance with the American National Standards Institute (ANSI A117.1) and the Americans with Disabilities Act (ADA), Schlage Lock Company offers a wide selection of locks designed for the needs of the physically challenged. This act is designed to provide protection for people with disabilities.

The intent of ADA is that owners of certain types of buildings must remove barriers and provide people with disabilities with access equal to, or similar to, that available to the general public.

B600/700/800-Series


The B600/700/800-Series are Schlage's highest grade deadbolt locks. Choose the 600 for Grade 1 security in high-traffic commercial applications. Choose the 700 or 800 and get standard a Primus XP controlled access cylinder (700) or Primus[®] XP high security cylinder with UL 437 rating (800). A variety of functions and finishes makes the B600/700/800-Series a versatile choice for added security no matter where you use it.

Pictured here: B600 (Grade 1) deadbolt with D-Series Orbit knob shown in 626 Satin Chrome



The toughest deadbolts in the business.

- 1" (25 mm) throw, high-strength steel alloy deadbolt with hardened steel roller resists sawing and kick-in attacks
- Precision-built solid brass 6-pin cylinders with phosphor bronze springs and nickel silver pins ensure long life and smooth operation
- Tough nickel silver keys for smooth, long-lasting operation
- · Exclusive concealed wood frame reinforcer protects wood jamb against kick-in attacks
- Free-spinning solid cylinder collar resists wrenching and prying
- Large inside thumbturn makes it easy to throw and retract deadbolt
- Metal shield protects bolt from ice-pick attack through the door
- · Hardened steel ball-bearings protect mounting bolts from drill attack

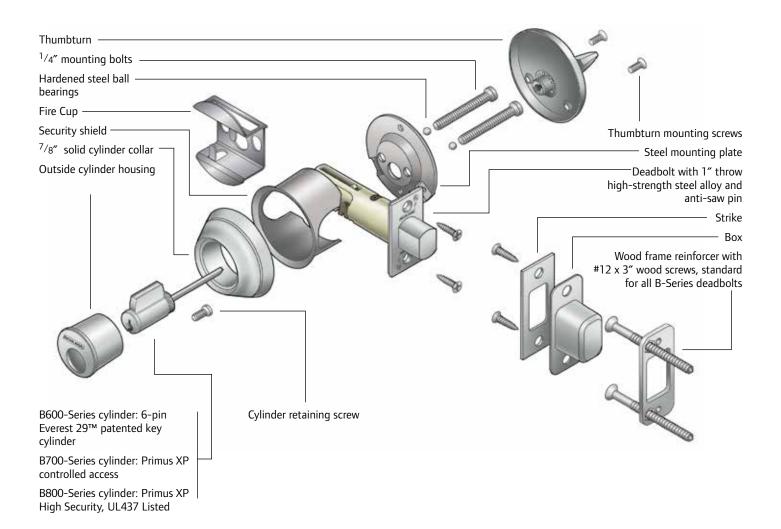

Deadbolt Designs

B600-Series

Schlage's toughest heavy duty Grade 1 commercial deadbolt.

Furnished with conventional cylinder standard.

Also available with full size interchangeable core cylinder or small format interchangeable core (SFIC) cylinder.

Requires 2¹/4" (55mm) prep. UL10B listing standard for auxiliary lock on A Label fire doors.



B700-Series

Same lock as B600-Series but furnished with Primus XP Controlled Access cylinder for patented key control, geographical exclusivity and resistance to picking and impressioning. Also available with Primus XP full size interchangeable core cylinder.



B800-Series


Same lock as B700-Series but Primus XP high security cylinder is UL437 listed to resist drilling and other forms of physical attack. Not available in interchangeable core.

All designs shown in 626 Satin Chrome







Deadbolt Finishes

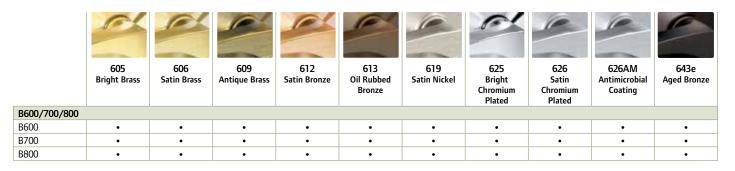

e = an equivalent finish to the BHMA standard.

Deadbolt Functions | ANSI A156.5 Bored Deadbolt Locks Grade 1





* Caution:

Double cylinder locks on any door are a life safety hazard in times of emergency and their use is not recommended. Installation should be in accordance with existing codes only.

ADA Compliant:

Schlage Lock Company offers a wide selection of locks designed to meet the Americans With Disabilities Act.

key outside or thumbturn inside.

Outside Inside

Single Cylinder Deadbolt

Deadbolt thrown or retracted by

B-600 Series

ANSI

E0151

SCHLAGE

One-way Deadbolt · Deadbolt thrown or retracted

by key outside.

Outside

86

SCHLAGE

One-way Deadbolt

Outside

key outside.

inside.

₿ ₿

Deadbolt thrown or retracted by

Blank plate with exposed screws

Inside

ANSI E0161

B761P

• Blank plate with exposed screws inside.

B661P

ANSI

E0161

Inside

ANSI

E0161

SCHLAGE

B660P



B-700 Series

SCHLAGE	ANSI
B760P	E0151

Single Cylinder Deadbolt


 Deadbolt thrown or retracted by key outside or thumbturn inside.

Outside Inside


I 8 占

B-800 Series

SCHLAGE	ANSI	SCHLAGE	ANSI
B860P	E0151	B861P	E016
 Single Cylinder Deadbo Deadbolt thrown or retrakey outside or thumbtur 	acted by	 One-way Deadbolt Deadbolt thrown or retra by key outside. Blank plate with exposed screws inside. 	



Product information and specifications contained in this catalog are subject to change without notice. Please consult the factory.

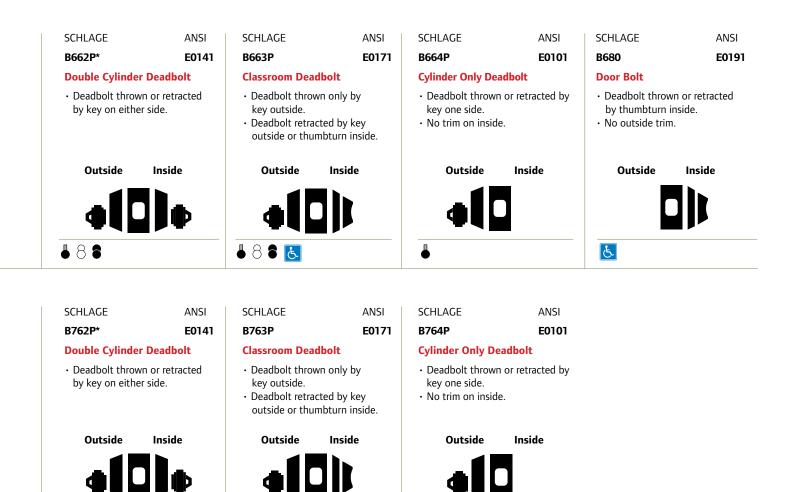

SCHLAGE	ANSI	SCHLAGE
B862P*	E0141	B863P
Double Cylinder I	Deadbolt	Classroon
 Deadbolt thrown by key on either s 		 Deadbolt key outs Deadbolt outside o
Outside	Inside	Outsi
•[]₽	•
₿		J 🕹

₿

₿8 🕹

SCHLAGE
ANSI

B863P
E0171

B864P

Classroom Deadbolt

• Deadbolt thrown only by key outside.

• Deadbolt retracted by key outside or thumbturn inside.

Outside

Inside

Outside

Inside



ANSI

E0101


B500-Series

The B500-Series deadbolt is a revolutionary new deadbolt that delivers higher security, tougher performance and the ultimate in installation versatility. Designed by locksmiths for locksmiths, the B500-Series deadbolt can be fitted with any Schlage cylinder, fits virtually every door you service, enhances lock strength on the jamb side of the door and will change forever the way you look at deadbolts.

Pictured here: B500 (Grade 2) deadbolt with ND-Series Athens lever shown in 626 Satin Chrome

The best deadbolt ever designed by locksmiths.

- · Adjustable backset with lock-in-place helix design
- Integrated anti-pry shield protects latch
- Thicker metal security strike back-up on jamb side
- Security strike on jamb has third screw for stronger, deeper anchoring
- · Added space inside strike box for true deadlatch
- Seamless steel construction from beginning of latch to back of bolt
- 10% larger diameter deadbolt
- Zinc bolt with spinning hardened steel pin inside
- Tapered front housing that can't be unscrewed
- Integrated trim piece for fewer pieces out of the box
- · Large, easy-to-use, ADA compliant thumbturn

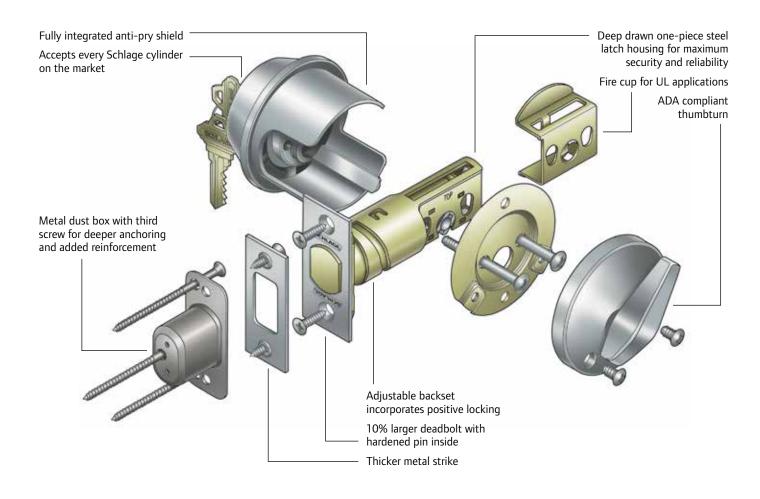

Deadbolt Designs

B500-Series

A versatile and economical Grade 2 deadbolt for medium duty commercial and heavy duty residential applications.

Furnished with conventional cylinder standard.

Available with Primus XP high security cylinder, Primus XP UL437 Listed high security cylinder, full size interchangeable core cylinder, Primus XP interchangeable core cylinder, or small format interchangeable core (SFIC) cylinder.

Fits $2^{1/8''}$ (55mm) prep standard and anti-pry shield can be removed to fit 1/2" (38mm) prep.



Full Size Interchangeable Core



Design shown in 626 Satin Chrome Plated

Deadbolt Finishes



Thumbturn for B500




B500 series with occupied indicator (B571)

	605 Bright Brass	606 Satin Brass	609 Antique Brass	612 Satin Bronze	613 Oil Rubbed Bronze	619 Satin Nickel	625 Bright Chromium Plated	626 Satin Chromium Plated	626AM Antimicrobial Coating	643e Aged Bronze
Product										
B500	•	•	•	•	•	•	•	•	•	•

e = an equivalent finish to the BHMA standard.

Deadbolt Functions | ANSI A156.5 Bored Deadbolt Locks

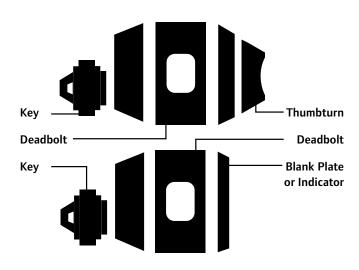

SCHLAGE

Deadbolt

₿8₿

by key outside.

Outside

B561

ANSI

Cylinder Only x Blank Plate

Deadbolt thrown or retracted

Blank plate with exposed screws inside.

E0162

Inside

Standard cylinder.
SIC - full size interchangeable core option.
SFIC - small format interchangeable core option.
Complies with ADA Accessibility Guidelines.

* Caution:

Double cylinder locks on any door are a life safety hazard in times of emergency and their use is not recommended. Installation should be in accordance with existing codes only.

ADA Compliant:

Schlage Lock Company offers a wide selection of locks designed to meet the Americans With Disabilities Act.

SCHLAGE	ANSI	SCHLAGE	ANSI	
B562P*	E0142	B563	E0172	
Double Cylind	er Deadbolt	Classroom De	adbolt	
Deadbolt throw key either side	wn or retracted by	by key outsic	own or retracted le. etracts bolt only.	
Outside	Inside	Outside	Inside	
₿8₿				

Single Cylinder Deadbolt					
B560P	E0152				
SCHLAGE	ANSI				

 Deadbolt thrown or retracted by key outside or thumbturn inside.

Outside Inside

SCHLAGE ANSI **B581 E01112**

Door Bolt with Trim

- Deadbolt thrown or retracted by trim unit only.
- Blank plate outside.

Outside Inside

R	50	0

F




B250-Series

Ideally suited for pool, apartment and condominium gates, utility panels and pipe chases, the Schlage B250-Series is tough, reliable and has a proven design that has been the industry standard for decades.

Pictured here: B250 deadbolt with ND-Series Rhodes lever shown in 626 Satin Chrome

The industry standard for tubular deadlatches.

- \cdot 9/16" (14 mm) throw deadlatch resists pry-in attacks and "shimming" of the latch
- Precision-built brass 6-pin cylinders with phosphor bronze springs and nickel silver pins ensure long life and smooth operation
- Tough nickel silver keys for smooth, long-lasting operation
- · Exclusive concealed wood frame reinforcer protects wood jamb against kick-in attacks
- · Cylinder collar reinforced with security inserts to resist wrenching and prying
- Thumbturn "holdback" feature retains the deadlatch in a retracted position when desired

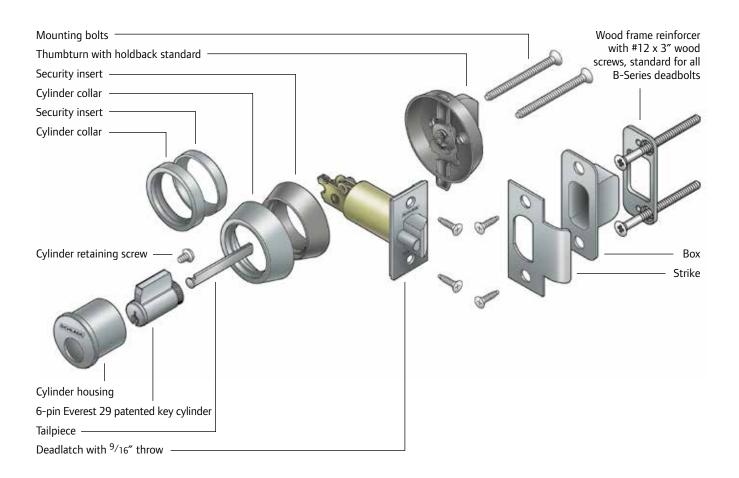

Deadbolt Designs

B250-Series

Considered the industry standard for tubular deadlatches for decades, the B250-Series is ideal for pool, apartment and condominium gates, utility panels and pipe chases.

Furnished with conventional cylinder standard.

Available with Primus XP access control cylinder, Primus UL437 Listed high security cylinder, full size interchangeable core cylinder and Primus interchangeable core cylinder.

Designed for $1^{1/2''}$ (38mm) prep. Optional adapter plates allow easy installation in $2^{1}/8''$ (55mm) prep.





Full Size Interchangeable Core




Thumbturn for B250

Design shown in 626 Satin Chromium Plated

Deadbolt Finishes



Deadbolt Functions | ANSI A156.5 Bored Dead Locks

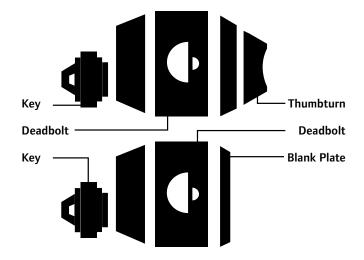




* Caution:

Double cylinder locks on any door are a life safety hazard in times of emergency and their use is not recommended. Installation should be in accordance with existing codes only.


SCHLAGE	ANSI	
B250	E0122	
Single Cylinder Deadlatch		
 Deadlatch retracted by key outside or thumbturn inside. 		

• Holdback feature standard.



Double Cylinder Dea	adlatch
B252*	E0112
SCHLAGE	ANSI


- Deadlatch retracted by key either side.
- No holdback.



Cylinders and Key Systems

Protect New Key Systems with Everest 29

Schlage can help you design a system that can grow and change along with your needs, allowing you the flexibility to upgrade your security without the need to replace all your cylinders.

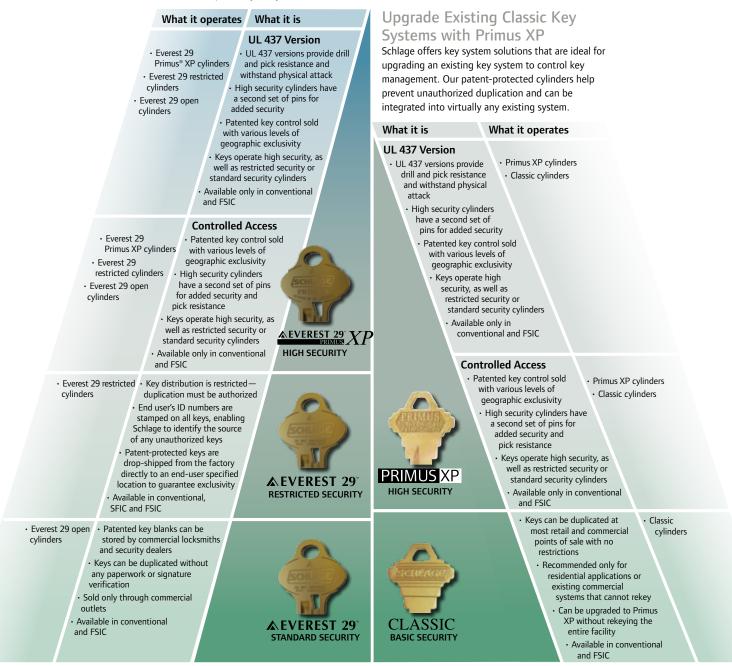


Standard Cylinders

Schlage locks are provided with cylinders precision built to extremely close tolerances and the highest standards of accuracy. Using only solid brass plugs, phosphor bronze springs, and nickel silver keys and bottom pins, ensures long life and ease of operation.

Cylinder plug face available in 606 and 626 finishes only.

Conventional cylinders are available in Classic keyways or in the patented Everest 29 keyways. Specify keyway to differentiate between Everest 29 and Classic.



Cylinders for B250-Series (Order tailpieces separately) This table also applies to discontinued B100, B200 and B400-Series deadlocks.

Number	Description	
22-002	Conventional 6-Pin cylinder only	
20-729-XP	Primus XP cylinder only	
20-529-XP	Primus XP UL437 Listed high security cylinder only	
22-019	Conventional 6-Pin cylinder in outside housing	
20-730-XP	Primus XP cylinder in outside housing	
20-530-XP	Primus XP UL437 Listed high security cylinder in outside housing	
22-020	Conventional 6-Pin cylinder in inside housing	
20-731-XP	Primus XP cylinder in inside housing	
20-531-XP	Primus XP UL437 Listed high security cylinder in inside housing	

B500 Series Cylinders (Single Cylinder Deadbolts)*

Number	Description	Door Thickness
22-003	Conventional Classic	13/8" - 13/4"
22-XXX	Everest 29, Specify Section	
20-188-XP	Primus XP 13/8" - 17/8"	
20-190-XP	Primus XP UL	

B500 Series Cylinders (Double Cylinder Deadbolts)*

Number*	Description	Door Thickness	
22-645	Conventional Classic	1 ³ /8" - 1 ³ /4"	
22-XXX	Everest 29™, Specify Section		
20-745-XP	Primus XP 13/8" - 17/8"		
20-545-XP	Primus XP UL		

*See price book for more door thicknesses and cylinder parts.

B500 Series Cylinders (B561 One Way Deadbolts)*

Number	Description	Door Thickness
22-069	Conventional Classic	
22-XXX	Everest 29, Specify Section	13/8'' - 21/4''
20-071-XP	Primus XP	13/8 - 21/4
20-072-XP	Primus XP UL	

Dummy Cylinder (simulates cylinder in housing)*

Number	Description	
B610-024	B600 / 700 / 800-Series	



Cylinders for B600/700/800-Series Deadlocks (Housing not included)

Lockset Function	Cylinder Number	Door Thickness	Cylinder Type
B660, B663	22-644	1 ³ /8" - 2 ¹ /2"	
	20-642	1³/8″ – 2″	
B661, B664	22-643	2" - 2 ¹ /2"	Conventional
DCC2	22-645	1³/8″ – 2″	
B662	22-646	2" - 2 ¹ /2"	
B760, B763	20-744-XP	1 ³ /8" - 2 ¹ /2"	
	20-742-XP	1³/8″ – 2″	
B761, B764	20-743-XP	2" - 2 ¹ /2"	Primus XP
D7C2	20-745-XP	1³/8″ – 2″	
B762	20-746-XP	2" - 2 ¹ / ₂ "	
B860, B863	20-544-XP	1 ³ /8" - 2 ¹ /2"	
	20-542-XP	1³⁄8″ – 2″	
B861, B864	20-543-XP	2" - 2 ¹ /2"	Primus XP UL437 Listed
DOC 2	20-545-XP	1 ³ /8″ – 2″	
B862	20-546-XP	2" - 2 ¹ / ₂ "	

Full Size Interchangeable Core (FSIC) \otimes

Schlage interchangeable core (IC) locksets allow immediate rekeying at the door simply by using the special control key to replace the core in seconds.

B250-Series Finishes: 605, 606, 609, 612,613, 625, 626



B500-Series Finishes: 605, 606, 609, 612, 613, 619, 625, 626, 643e



B600/700/800-Series Finishes: 605, 606, 609, 612, 613, 619, 625, 626, 643e



Available in B250, B500, B600 and B700-Series, full size interchangeable cores can be integrated into any 5 or 6-pin Schlage key with no adverse affects on keying capacity.

Full Size Interchangeable Cores and Housings - Options

Full Size Core

Conventional corePrimus XP core

Cores available 606 and 626 finish only. Everest 29 S123 keyway standard.



Small Format Interchangeable Core (SFIC)

Available in B500 and B600-Series, the small format IC option is designed for Schlage Everest 29 R Family restricted keyway cores and is also completely compatible with Best^{*}, Falcon, and other small format cores.

- 7-Pin uncombinated Everest 29 R Family restricted keyways
- 7-Pin combinated Everest 29 R Family restricted keyways
- 6-pin uncombinated Falcon / Best keyways
- 7-pin uncombinated Falcon / Best keyways
- Disposable plastic construction core


80-033 and 80-043 cores are available in Best A, B, C, D, DD, E, F, G, H, J, K, L, N, O, R, TB and TD keyways. Specify keyway by suffixing "B" to keyway letter, e.g. "AB".

80-036 and 80-037 restricted keyway cores require a letter of authorization from the end user. Schlage assigns the keyway when establishing new Everest 29 restricted key systems.

Small Format Core

Disposable Construction Core






Latches and Bolts

B-Series bolt and latch fronts are available in a variety of configurations to fit your door prep dimensions. Latches are furnished in brass, bronze or chrome finishes compatible with the lock finish.

B250-Series Deadlatches



Number	Backset Description		Housing
12-100	2 ³ /8″	1 ¹ /8" x 2 ¹ /4" - square corner standard	1″
12-103	2 ³ /4″	1 ¹ /8" x 2 ¹ /4" - square corner	1″


B500-Series Deadbolts

Square Corner Bolt

olt Radius Corner Bolt

Circular/Drive-in Bolt








Number	Backset	Description	Housing
12-288		$1 \times 2^{1/4}$ " - square corner	1″
12-289		1 x $2^{1}/4''$ - $^{1}/4''$ radius corner	1″
12-287	Adjustable: 2 ³ /8" or 2 ³ /4"	Triple option includes: square corner, 1/4" radius and drive-in faceplates	1″
12-290		Circular / drive-in (626 only)	1″
12-291		$1^{1}\!/\!\!s'' \ge 2^{1}\!/\!\!4''$ - square corner	1″

Door Reinforcement

Reinforcing unit is required to reinforce and help prevent the collapse of hollow metal doors when locksets are tightly mounted. This kit should be used with long backsets for B-Series lock installations in hollow metal doors to prevent lateral movement of the latchbolt. Specify door thickness, $1^{3}/8''$ (35 mm) or $1^{3}/4''$ (44 mm), when ordering reinforcement kits.



B600/700/800-Series Deadbolts

Square Corner Bolt

Circular / Drive-in Bolt





Number	Backset	Description	Housing
12-297	2-3/8 or	Square corner, 1-18" x 2-1/4"	1"
12-317	2-3/4" adjustable	Circular / drive-in (626 only)	I
12-630	7 ³ /8″	1 ¹ /8" x 2 ¹ /4" - square corner	1″
12-640	23/8	Circular / drive-in (626 only)	1 ¹ /16″
12-631	-2."	1 ¹ /8" x 2 ¹ /4" - quare corner	1″
12-641	2 ³ /4″	Circular / drive-in (626 only)	1 1/16″
12-632		1 ¹ /8" x 2 ¹ /4" - square corner	1″
12-642	3³/4″	Circular / drive-in (626 only)	1 1/16″
12-633	_″	1 ¹ /8" x 2 ¹ /4" - square corner	1″
12-643	5″	Circular / drive-in (626 only)	1 1⁄16″

Strikes

All B-Series strikes are fully reversible for right handed and left handed doors, and are furnished complete with screws. Strike boxes are also included with all standard strikes. B-Series deadbolt strikes are also packed with our exclusive wood frame reinforcer or a metal dust box reinforcer for added protection against "kick-in" attack.

Standard Strike

Strike Box Drive-In Strike






Strikes for Deadbolts

B500	B600	Number	Lip Length	Description
	x	10-055	-	1 ¹ / ₈ " x 2 ³ / ₄ " x ³ / ₃₂ " Square corner, B600/700/800
x	x	10-064	-	1 ³ /16" Circular drive-in
x	х	10-087	1 ³ /16″	1 ¹ /4" x 4 ⁷ /8" ANSI
x	x	10-092	11/8″	15/8" x 21/4" Radius round corner, no box
x	x	10-094	-	1^{1} /8" x 2^{1} /4" x 3^{\prime} Square corner, no box
x	x	10-095	1 ¹ /8″	15/8" x 21/4" Full lip, no box
x	x	B250-283	-	Box for 10-055, 10-094 and 10-108
x		10-104	-	¹ /4" round corner 1 ¹ /4" x 3 ⁵ /8". 4 hole no reinforcement strike provided. 605, 609, 620, 650 only
x		10-108	-	Round corner, 11/8" x 23/4"
x	x	10-103		$^{1/4''}$ round corner 1" x 2 $^{1/4''}$, no reinforcement strike provided. 605, 609, 630 only


Strikes for Deadlatches

Number	Lip Length	Description
10-001	1", 1 ¹ /8", 1 ¹ /4", 1 ¹ /2", 1 ³ /16", 1 ³ /4"	1 ¹ / ₈ " x 2 ³ /4" Square corner
10-004	11/8″	11/8" x 23/4" Radius round corner
10-025	13/16", 13/8"	11/4" x 27/8" ANSI
C603-623	-	Box for T-strike
K510-066	-	Box for 10-025

Rabbeted Latch and Strike Kit 39-030







Furnished with standard and round corner deadbolt strikes, this reinforcer significantly strengthens a jamb against "kick-in" attack and greatly increases the security of the lock. The reinforcer is concealed under the strike and is anchored to the jamb with two 3" long screws. B500 Series metal dust box reinforcer anchors (B520-622) to jamb with three 3" screws.

Thumbturn Assemblies and Inside Plates



B302-041 B560, B580, B581 **B302-045** B563



12-617 B660/760/860 **12-618** B663/763/863



B202-672 B250 with holdback (standard)



12-626 B661/761/861



B202-671 B250 without holdback




38-034 Blank mounting plate kit for B580

Accessories and Other Parts

Adapters for B250 and B500-Series in 2 1/8"

Prep (Specify finish)



thumbturn

Thin door spacer fits under 38-031 adapter for B250-Series.

38-016 Kit for B252 contains two 38-031 adapters 38-017 Kit for B250 contains one 38-031 and one 38-032 adapter



Inside Cylinder Faceplates for B562 and B662/762/862 (Specify finish)

Tailpieces

B250-Series Tailpieces (Non-IC Models)

Function	Pins	Door Range	Tailpiece	
B250	5 or 6	1 ³ /8"-2 ³ /4" (35 mm-70 mm)	B202-558	
B252	5 or 6	1 ³ /8"-1 ³ /4" (35 mm-44 mm)		
	6	2", 2 ³ /4" (51 mm, 70 mm)	B202-370	
	6	2 ¹ /4", 2 ¹ /2" (58 mm, 64 mm)	B202-269	
	5	2 ¹ /2" (64mm)	B202-453	

Two each required for double cylinder locks.

B500-Series Tailpieces (Non-IC Models)

Function	Description	Tailpiece
B560, B563	1 ³ /8" - 1 ³ /4" (35 mm - 44 mm)	B520-651
	1 ³ /4" - 2 ¹ /4" (44 mm - 58 mm)	B520-652
B571	1 ³ /8"-2 ¹ /4" (35 mm-58 mm)	B520-653
B580, B581	1 ³ /8"-2 ¹ /4" (35 mm-58 mm)	B600-041
B562	1 ³ /8" - 1 ³ /4" (35 mm - 44 mm)	B600-045
	1 ³ /4" - 2 ¹ /4" (44 mm - 58 mm)	B600-046

Two each required for double cylinder locks. See price book for additional tailpieces.

B600/700/800-Series Tailpiece and Retainer Packs (Non-IC)

Function	Door Range	Classic Convent'l	All Others
B660/760/860, B663/763/863	1 ³ /8"-2 ¹ /2" (35 mm-64 mm)	B610-044	B610-084
B662/762/862	1 ³ /8″-2″ (35 mm-51 mm)	B610-045	B610-085
(dbl. cylinder)	>2″-2 ¹ ⁄₂″ (>51 mm-64 mm)	B610-046	B610-086
B661/761/861.	1³⁄8″−2″ (35 mm−51 mm)	B610-042	B610-082
B664/764/864	> 2″- 2 ¹ ⁄₂″ (>51 mm-64 mm)	B610-043	B610-083

Two each required for double cylinder locks.

B-Series Interchangeable Core Tailpieces

Function	Tailpiece
B560BD, B563BD	B202-957
B560J, B660J, B661J, B663J	B600-041
B562BD (two tailpieces required)	B202-580
B562J, B662J (two tailpieces required)	B600-040
B660BD, B663BD	B202-557
B561BD	B220-032
B662BD (two tailpieces required)	B202-370
B662BD thick door (two tailpieces required)	B202-453

B600R and B700R-Series use the same tailpieces as listed for B600J-Series.

Specifications

Handing:

B250-Series deadlatches are reversible. All other B-Series locksets are non-handed.

Door Thickness:

B500-Series, 5-pin: $1^{3/8''}$ to $1^{3/4''}$ (35mm to 44 mm) standard. Available to $2^{1/4''}$ (57mm), assembled to order.

B250-Series, 5-pin: $1^{3/8''}$ to $1^{3/4''}$ (35mm to 44mm) standard. Available to $2^{1/4''}$ (57mm), assembled to order.

B600/700/800-Series: $1^{3}/4''$ to 2" (44mm to 51mm) standard. Available for $1^{3}/8''$ (35mm) and doors up to $2^{1}/2''$ (63mm), assembled to order. Door ranges may vary by function.

Backset:

B500-Series: Adjustable for 2³/8" (60mm) or 2³/4" (70mm) standard. B250-Series: 2³/8" (60mm) standard. 2³/4" (70mm) optional. B600/700/800-Series: 2³/4" (70mm) standard, 2³/8" (60mm), 3³/4" (95mm), 5" (127mm) optional.

Front:

Brass, bronze or stainless steel. $1^{1/8''} \times 2^{1/4''}$ (29mm x 57mm) square corner, beveled.

Dead Bolt:

1" (25 mm) throw with saw-resistant hardened steel insert.

Latch Bolt:

Brass, ⁹/16" (14mm) throw, deadlocking on keyed and exterior functions.

Exposed Trim:

Wrought or forged brass or bronze, or pressure cast zinc.

Thumbturn:

Pressure cast zinc, plated to match finish symbols.

Strike:

B250 and B600/700/800-Series: $1^{1/8''} \times 2^{3/4''}$ (32mm x 70mm) with steel reinforcer and two 3'' screws standard.

B500 Series: $1^{1/8''} \times 2^{3/4''}$, metal dust box reinforcer and three 3'' screws. Optional strikes, lip lengths and ANSI strike box available. See page 27.

Cylinder & Keys:

6-pin patented Everest 29 S123 keyway standard with two nickel silver keys per lock. Items specified in C keyway will be furnished 5-pin.

Keying Options:

Interchangeable core and Primus XP high security cylinders. Master keying, grand master keying and construction keying.

Warranty:

Commercial: Three-year limited.

Certifications

ANSI:

B500 and B250-Series meet or exceed A156.5 Grade 2 strength and operational requirements.

B600/700/800-Series meets or exceeds A156.5 Grade 1 strength and operational requirements.

UL / cUL:

B600/700/800-Series locks are UL10B Listed auxiliary locks for A label single doors, 4 ' x 8 '.

UL10B Listing optional for B500-Series as auxiliary locks. Letter F and UL symbol on latch front indicate listing.

UL437 Listed locking cylinder optional:

Specify Primus 20-500 Series cylinder for B500 and B250-Series Grade 2 products, or specify B800-Series Grade 1 products.

ADA Compliant:

Schlage Lock Company offers a wide selection of locks designed to meet the Americans With Disabilities Act.





Ingersoll Rand (NYSE:IR) advances the quality of life by creating and sustaining safe, comfortable and efficient environments. Our people and our family of brands—including Club Car[®], Ingersoll Rand[®], Schlage[®], Thermo King[®] and Trane[®]—work together to enhance the quality and comfort of air in homes and buildings; transport and protect food and perishables; secure homes and commercial properties; and increase industrial productivity and efficiency. Schlage is the leader in security devices, trusted for 90 years, spanning both the commercial and residential markets. Ingersoll Rand is a \$14 billion global business committed to a world of sustainable progress and enduring results.











securitytechnologies.ingersollrand.com

ingersollrand.com