



RECESSED HOOK




NF-R64

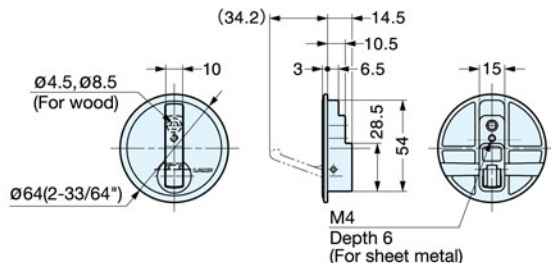

- Hook is spring loaded to retract.
- Ideal for vibration or shock application.
- Panel Thickness:
 - Wood: Minimum 25 mm (1")
 - Sheet metal: 0.8~1.6 mm with optional bracket NF-50, sold separately.

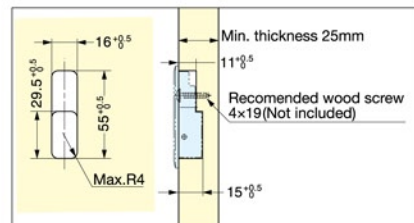

Bore Dimensions
(For thickness over 25~29 mm)

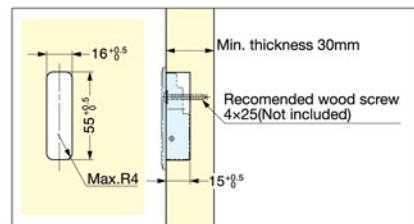

Bore Dimensions
(For thickness over 30 mm)

Item No.	Load Capacity (kg)	Weight (g)	Box (pcs)	Carton (pcs)	Material	Finish
NF-R64	20 (44 lbs)	90	10	120	Zinc Alloy	Chrome