CLOSET HARDWARE



CLOSET ROD LIFT MECHANISM

Innovative closet storing mechanism to hang clothes in high places, allowing for your closet space to be utilized more efficiently.

New Shock Absorbing Mechanism:

Designed to soften sudden "pop-ups" even when rod is released halfway.

Allows the closet rod to stay at position when the rod is pulled all the way down.

Easy to use:

Easy to return the rod to its normal position.

Simple to install:

Install mounting plate on the wall, fasten rod unit to the mounting plate with one hidden screw.



We offer single, double or a T-type to accommodate your
















Easy Installation:

- ① Secure the mounting plate in the selected area with screws.
- ② Insert the body into the fastening holes located on the mounting plate.
- ③ Rotate the body until the arm is locked (approximately 12°).
- ④ Simply secure the body to the mounting plate with one screw.



Improved Pipe Fixture for TAS



Insert the pipe end into arm hole and tighten the pipe fixture by turning clockwise as shown.

Flexible Pull Down Rod





Flexible pull down rod allows smooth operation.







TAS (SINGLE TYPE)



TAW (DOUBLE TYPE)









- This single-type model is designed for installation on a side wall of a cabinet or closet.
- Both right-hand and left-hand models are available.


Load capacity: Up to 8 kg (17.6 lbs) (evenly distributed). Packaging: 1 set/box (about 5 kg or 11 lbs).

- The double-type model is designed for installation on side walls of a cabinet or closet, using it in full width.
- Adjusting the length of the rod is easily done in just one step.

Load capacity: Up to 15 kg (33 lbs) (evenly distributed).
Packaging: 1 set/box (about 9 kg or 19.8 lbs).

- The T-type model is designed for front facing installation with the use of a bracket which is sold separately (TAB).
 Create space more efficiently by
- separating short and long clothes.

Load capacity: Up to 8 kg (17.6 lbs) (evenly distributed).
Packaging: 1 set/box (about 5 kg or 11 lbs).



*Thickness of Distance Plate

0210 0210	800-118	30 - 51 - 51 - 25 - 25 - 34 - 34 - 23 - 34 - 34 - 34 - 34 - 34
0210-II		70-2

*Thickness of Distance Plate


	2. 034	620
0210	40	9

Product Specification	Grey (G)	Umber (U)
Right-Hand	TAS-800R/G	TAS-800R/U
Left-Hand	TAS-800L/G	TAS-800L/U


Product Specification	
Grey (G)	Umber (U)
TAW-1200/G	TAW-1200/U

Product Specification	Grey (G)
Right-Hand	TAT-800R/G
Left-Hand	TAT-800L/G
Lort Haria	17 (1 000E) G


TAS-800L



TAW-1200



TAT-800L




www.sugatsune.com



1-800-562-5267 (U.S.A. Only)



TALLMAN OPTIONAL PARTS

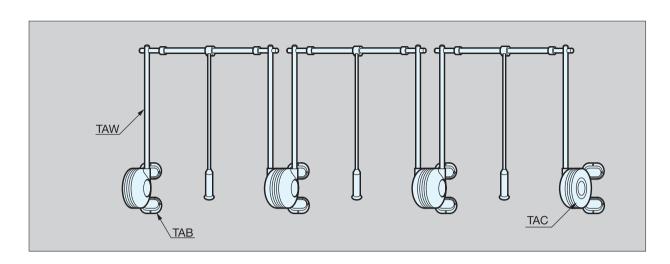


BRACKET



TAB

Back wall mount bracket for TAS, TAW and TAT.





Item No.	Weight (kg)	Box (pcs)	Carton (pcs)	
TAB/G	1 5 (2 2 lba)	1	4	
TAB/U	1.5 (3.3 lbs)		4	

Material	Color
Steel/Plastic	Grey
Steel/Flastic	Umber

COVER FOR TAB BRACKET







122	4 0202.5

Ø4.4, Ø8.4

Item No.	Weight (kg)	Box (pcs)	Carton (pcs)	
TAC/G	0.21 (0.46 lbs)	1	4	
TAC/U	0.21 (0.46 105)	ļ .	4	

Material	Color
Ctool	Grey
Steel	Umber