



The 9600 series Genesis™ is a windstorm rated, surface mounted electric strike designed to accommodate rim exit devices with a 3/4" throw latchbolt. All components are completely encased within its 3/4" thick stainless steel housing, so no cutting on the frame is required for installation. Simply place the electric strike on the surface of the frame, align it with the exit latchbolt and install. It is field selectable for fail secure and fail safe operation, and for 12 or 24VDC.

The 9600 is the only surface mounted electric strike designed with the strength and durability required to exceed the severe forces of ANSI Windstorm testing.

9600 Series

The surface mounted, windstorm rated solution

Specifications


- ANSI 250.13-2003 Severe windstorm listed
- Florida Building Code Approved (FL#14307)
- UL1034 burglary-resistant listed and suitable for outdoor use
- ANSI/BHMA, A156.31 Grade 1
- Patent: 6,392,520


Frame Application

- Metal
- Wood

Electrical

- .45 Amps @ 12VDC continuous duty
- .25 Amps @ 24VDC continuous duty

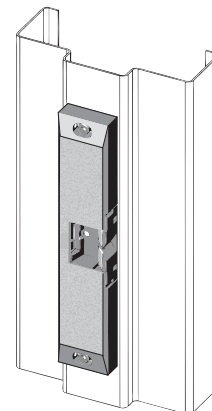

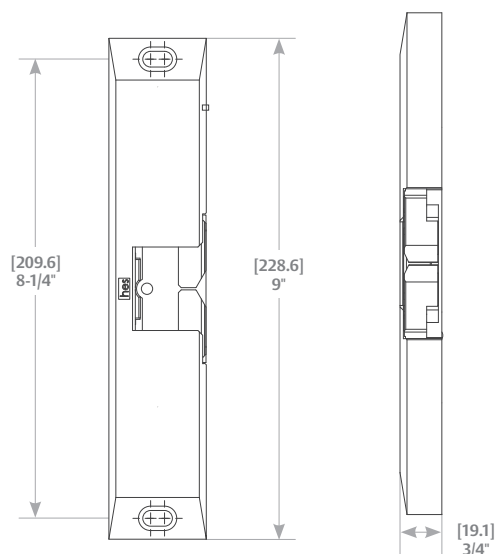

Standard Features

- Completely surface mounted
- Stainless steel construction
- Tamper resistant
- Static strength 1,500 lbs.
- Dynamic strength 70 ft-lbs.
- Endurance 1,000,000 cycles
- Field selectable fail safe/fail secure
- Dual voltage 12 or 24VDC
- Horizontal adjustment
- Non-handed
- Internally mounted solenoid
- Accommodates up to 3/4" Pullman latch
- Five-year limited warranty

Optional Features

- **LBM** » Latchbolt monitor
- **LBSM** » Latchbolt strike monitor

Accessories

- 9400/9500/9600-108** » Spacer plate (black or 630 finish)
- SMB** » Surface mounting box
- 2001M** » Plug-in bridge rectifier
- 2004M** » ElectroLynx® adapter
- 2005M3** » SMART Pac® III
- 2006M** » Plug-in buzzer

Finishes

- 630** » Satin stainless steel
- 605** » Bright brass
- 606** » Satin brass
- 612** » Satin bronze
- 613** » Bronze toned
- 629** » Bright stainless steel



RIM EXIT DEVICES

FIELD SELECTABLE
(12 OR 24VDC)FIELD SELECTABLE
(FAIL SECURE / FAIL SAFE)

GRADE 1



OUTDOOR RATED

UL 1034
BURGLARY LISTEDANSI A250.13-2003
WINDSTORM RESISTANT