

Drawer slides for wooden drawers

- ▶ **Quadro V6 full extension slide with Silent System and Push to open**
- ▶ **Load capacity 90 lbs**

Quadro V6 IW21 full extension slide



- ▶ Slide on installation with catches and tool-less height adjustment
- ▶ Side adjustment up to +/- 2 mm with 2D front fixing clips
- ▶ Various user friendly functions (see ordering table)
- ▶ Convenient slide on installation with catches and tool-less drawer adjustment
- ▶ Meets or exceeds ANSI / BHMA 156.9 grade 1 requirements
- ▶ Load capacity up to 90 lbs dynamic (100 lbs static), as per ANSI / BHMA 156.9 grade 1 specifications on a 21" length slide
- ▶ Galvanized steel, suitable for rooms exposed to moisture
- ▶ For 1 / 2" (13 mm) or 5 / 8" (16 mm) drawer side thickness
- ▶ For narrow applications

Pack of two

Item	Silent System	Silent System with locating tab	Push to open
	1 pair	1 pair	1 pair
Quadro V6 9"	9 304 257	9 304 294	-
Quadro V6 12"	9 304 260	9 304 297	9 304 314
Quadro V6 15"	9 304 266	9 304 300	9 304 318
Quadro V6 18"	9 304 274	9 304 303	9 304 321
Quadro V6 21"	9 304 282	9 304 306	9 304 324
Quadro V6 24"	9 304 286	-	9 304 310

Bulk pack

Item	Silent System pack of 10 (*20)		Silent System with locating tab pack of 10 (*20)		Push to open pack of 10	
	left	right	left	right	left	right
Quadro V6 9"	9 304 255*	9 304 256*	9 304 292*	9 304 293*	-	-
Quadro V6 12"	9 304 258	9 304 259	9 304 295	9 304 296	9 304 312	9 304 313
Quadro V6 15"	9 304 261	9 304 262	9 304 298	9 304 299	9 304 315	9 304 316
Quadro V6 18"	9 304 271	9 304 272	9 304 301	9 304 302	9 304 319	9 304 320
Quadro V6 21"	9 304 280	9 304 281	9 304 304	9 304 305	9 304 322	9 304 323
Quadro V6 24"	9 304 283	9 304 284	-	-	9 304 308	9 304 309

Drawer slides for wooden drawers

- ▶ Quadro V6 full extension slide with Silent System and Push to open
- ▶ Load capacity 90 lbs

Front fixing clip sets 1D Top mount 5/8"



- ▶ Set contains one front fixing clip left / right each
- ▶ For 16 mm (5/8") drawer material thickness
- ▶ With + 3 mm toolless height adjustment
- ▶ Minimum drawer inside width = 165 mm (6 1/2")
- ▶ Installation recommended with two # 6 x 5/8" flat head screws per clip

Item	Order no.	PU
Front fixing clip set for 5/8"	9 306 538	100
	9 308 662	10

Front fixing clip sets 1D Top mount 1/2"



- ▶ Set contains one front fixing clip left / right each
- ▶ For 13 mm (1/2") drawer material thickness
- ▶ With + 3 mm toolless height adjustment
- ▶ Minimum drawer inside width = 165 mm (6 1/2")
- ▶ Installation recommended with two # 6 x 3/4" flat head screws per clip

Item	Order no.	PU
Front fixing clip set for 1/2"	9 306 537	100
	9 308 661	10

Front fixing clip sets 1D Front mount 5/8"



- ▶ Set contains one front fixing clip left / right each
- ▶ For 16 mm (5/8") drawer material thickness
- ▶ With + 3 mm toolless height adjustment
- ▶ Minimum drawer inside width = 165 mm (6 1/2")
- ▶ Installation recommended with two # 6 x 5/8" flat head screws per clip

Item	Order no.	PU
Front fixing clip set for 5/8"	9 306 534	100
	9 308 638	10

Front fixing clip sets 1D Front mount 1/2"



- ▶ Set contains one front fixing clip left / right each
- ▶ For 13 mm (1/2") drawer material thickness
- ▶ With + 3 mm toolless height adjustment
- ▶ Minimum drawer inside width = 165 mm (6 1/2")
- ▶ Installation recommended with two # 6 x 3/4" flat head screws per clip

Item	Order no.	PU
Front fixing clip set for 1/2"	9 306 533	100
	9 308 637	10

Advice

- ▶ Dimensions in millimeters (inch approximations as noted). Subject to technical modifications without notice.

Drawer slides for wooden drawers

- Quadro V6 full extension slide with Silent System and Push to open
- Load capacity 90 lbs

Front fixing clip sets 2D Top mount 5/8"



- Set contains one front fixing clip left / right each
- Side adjustment up to +/- 2 mm
- For 16 mm (5/8") drawer material thickness
- With + 3 mm toolless height adjustment
- Minimum drawer inside width = 165 mm (6 1/2")
- Installation recommended with two # 6 x 5/8" flat head screws per clip

Item	Order no.	PU
Front fixing clip set for 5/8"	9 306 540	100
	9 308 664	10

Front fixing clip sets 2D Top mount 1/2"



- Set contains one front fixing clip left / right each
- Side adjustment up to +/- 2 mm
- For 13 mm (1/2") drawer material thickness
- With + 3 mm toolless height adjustment
- Minimum drawer inside width = 165 mm (6 1/2")
- Installation recommended with two # 6 x 3/4" flat head screws per clip

Item	Order no.	PU
Front fixing clip set for 1/2"	9 306 539	100
	9 308 6643	10

Front fixing clip sets 2D Front mount 5/8"



- Set contains one front fixing clip left / right each
- Side adjustment up to +/- 2 mm
- For 16 mm (5/8") drawer material thickness
- With + 3 mm toolless height adjustment
- Minimum drawer inside width = 165 mm (6 1/2")
- Installation recommended with two # 6 x 5/8" flat head screws per clip

Item	Order no.	PU
Front fixing clip set for 5/8"	9 306 536	100
	9 308 640	10

Front fixing clip sets 2D Front mount 1/2"



- Set contains one front fixing clip left / right each
- Side adjustment up to +/- 2 mm
- For 13 mm (1/2") drawer material thickness
- With + 3 mm toolless height adjustment
- Minimum drawer inside width = 165 mm (6 1/2")
- Installation recommended with two # 6 x 3/4" flat head screws per clip

Item	Order no.	PU
Front fixing clip set for 1/2"	9 306 535	100
	9 308 639	10


Advice

- Dimensions in millimeters (inch approximations as noted). Subject to technical modifications without notice.

Drawer slides for wooden drawers

- Quadro V6 full extension slide with Silent System and Push to open
- Load capacity 90 lbs

Planning dimensions

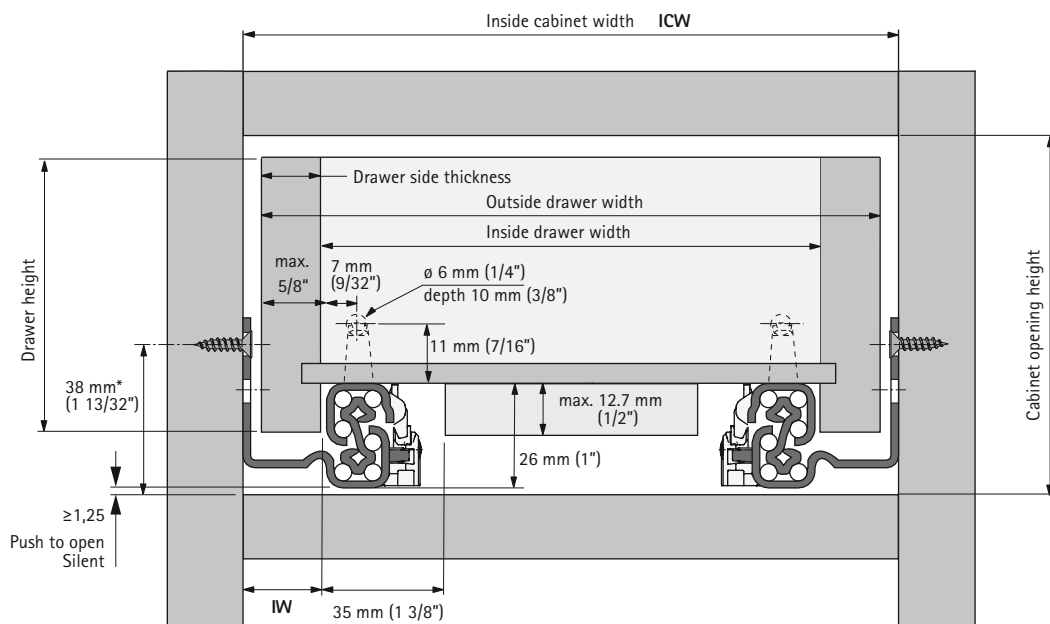

IW = Installation width	21 mm	
Drawer side thickness	1/2" (13 mm)	5/8" (16 mm)
Outside drawer width =	ICW - 5/8" (16 mm)	ICW - 3/8" (10 mm)
Inside drawer width =	ICW - 1 1/32" (42 mm)	


* 36 mm (1 13/32") with face frame
 * 38 mm (1 1/2") without face frame

Maximum drawer height = cabinet opening height minus 20 mm (13/16")


Minimum cabinet opening height = drawer height plus 20 mm (13/16")

Dimensions in millimeters (inch approximations as noted)

1D

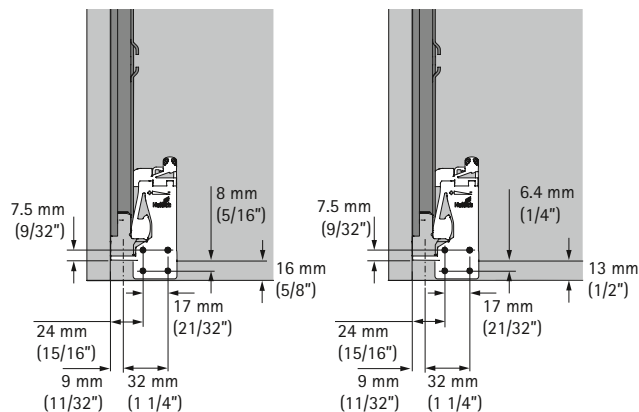

2D

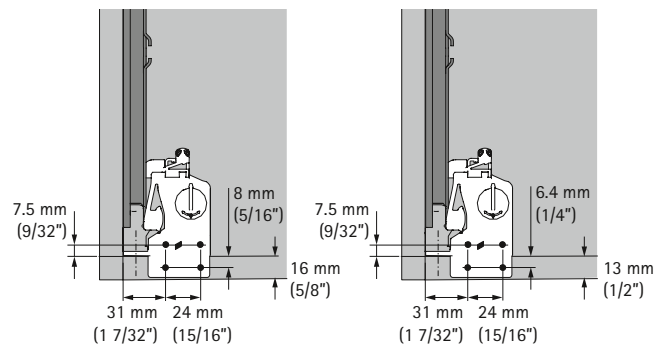

Advice

- Dimensions in millimeters (inch approximations as noted). Subject to technical modifications without notice.