

Heavy-Duty

150 lb. Load Class

1/2" Side Clearance

Max. Drawer Width: 36"



8650FM Heavy-Duty Soft-Close Full Extension Drawer Slide

The 8650FM Soft-Close Full Extension Drawer Slide is designed to accommodate wider and heavier drawers for today's challenging applications in the commercial, residential and education markets. This slide has a shorter profile vs. traditional lateral file slides and features a lever disconnect.

Applications

- Residential and Commercial Furniture
- Commercial Storage
- Retail Store Displays

Specifications

Model: 8650FM Full Extension Drawer Slide

Mounting: Side

Disconnect: Butterfly Lever

Hole Pattern: 32mm and Traditional

Face Frame Mounting: Slide must be blocked out. See face frame diagram (Do not use a rear mounting bracket.)

Type: Ball-Bearing

Travel: Full Extension (14" and 16" less than full extension. See chart on back for details.)

Finish: Zinc

Length: 14", 16", 18", 20", 22", 24", 26", 28"

Clearance: .51" + .01" - 0" on each side

Height: 1.98" [50.4mm]

Packaging: Bulk Pack (8650FMB): all sizes - 5 pair per carton

Action: Telescopic

Slide Configuration: Unhanded

Load Rating

Load: 150 lb.

Max. Drawer Width: 36"

Slides: 18"

Drawer Width: 36"

Cycles: 50,000 (center pull)

As with all Knap & Vogt drawer slides, the 8650FM is designed to meet or exceed ANSI performance standards as established by BIFMA, BHMA and KCMA.


Hardware

#7 x 1/2" Phillips Truss Head

Warranty

Limited Lifetime Warranty

Profile




Clearance

.51" + .01" - 0"
12.9mm + .3mm - 0mm

Charted Information

Face Frame

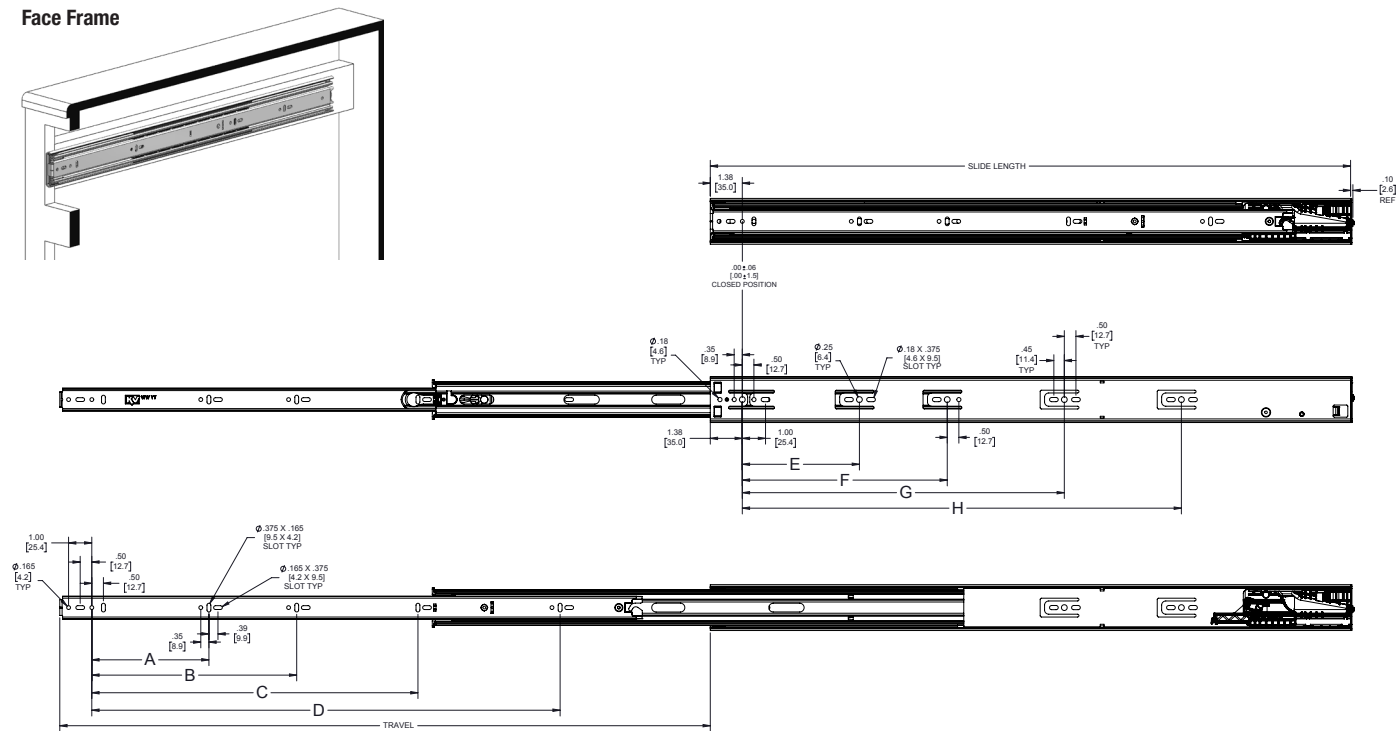

SKU Number	Slide Size inch/mm	Length inch/mm	Travel inch/mm	A inch/mm	B inch/mm	C inch/mm	D inch/mm	E inch/mm	F inch/mm	G Inch/mm	H Inch/mm
8650FMB 14	14" [350mm]	13.8" [350mm]	11" [279mm]	—	—	4.82" [122mm]	—	5.04" [128mm]	—	—	—
8650FMB 16	16" [400mm]	15.8" [400mm]	15" [381mm]	5.04" [128mm]	—	6.85" [174mm]	—	5.04" [128mm]	7.56" [192mm]	—	
8650FMB 18	18" [450mm]	17.7" [450mm]	18" [457mm]	5.04" [128mm]	—	8.88" [226mm]	—	5.04" [128mm]	8.82" [224mm]	—	
8650FMB 20	20" [500mm]	19.7" [500mm]	20" [508mm]	5.04" [128mm]	—	9.92" [252mm]	—	5.04" [128mm]	8.82" [224mm]	11.34" [288mm]	
8650FMB 22	22" [550mm]	21.7" [550mm]	22" [559mm]	5.04" [128mm]	—	10.95" [278mm]	15" [381mm]	5.04" [128mm]	8.82" [224mm]	12.60" [320mm]	
8650FMB 24	24" [600mm]	23.6" [600mm]	24" [610mm]	5.04" [128mm]	8.82" [224mm]	11.98" [304mm]	16.38" [416mm]	5.04" [128mm]	8.82" [224mm]	13.86" [352mm]	
8650FMB 26	26" [650mm]	25.6" [650mm]	26" [660mm]	5.04" [128mm]	8.82" [224mm]	13.01" [331mm]	19" [482mm]	5.04" [128mm]	8.82" [224mm]	13.86" [352mm]	16.38" [416mm]
8650FMB 28	28" [700mm]	27.6" [700mm]	28" [711mm]	5.04" [128mm]	8.82" [224mm]	14.04" [357mm]	20.16" [512mm]	5.04" [128mm]	8.82" [224mm]	13.86" [352mm]	18.90" [480mm]

14" extension is 11"; 16" extension is 15"